

LS183 Spectrum Transmission Meter

User Manual V4.1

LS183 is able to simultaneously measure and display UV, VL and IR transmission values. This meter is self-contained light sources and self-calibration. No adjustment is needed. The users only need plug the power supply, turn on the switch and put the sample in the opening. The resulting performance data appear on the display.

I: LS183 parameter

1. Size: 216mm *134mm *29mm (L*H*W)
2. Testing opening: Wide 47mm * Height 91mm
3. Weigh: 590g
4. Sample thickness: < 47mm
5. Resolution: 0.1%
6. Accuracy: $\pm 2\%$ (Colorless and transparent material)
7. UV peak wavelength: 365nm
8. VL wavelength: 380nm-760nm, CIE function of photopic vision
9. IR Peak wavelength : 940nm
10. Power supply: 5V AC/DC Adapter



II: LS183 structure

- “OFF/ON” Power Switch.
- “5VDC” The power supply socket.
- “USB” Micro USB socket, mobile power supply to power the instrument.
- “Display1,Display2,Display3”, Dial switch for three different display interface.

III: Meter Operation

1. Power on self test


Plug the power supply, keep the testing opening is empty, turn on the switch, waits for the meter to self-test, when self-test is successful, three “100%” will show on the LCD. If self test failed ,the following reasons for failed “Self-test” :

- a) Testing sample in the testing opening during Meter powering on.
- b) Ambient Light too strong.
- c) Too much dust in the testing hole , please clean the dust with air duster gun.
- d) Equipment damage, need to send back to the factory repair.



2. Measurement

Place sample into the testing opening to measure the performance characteristics. Refer to the following picture demonstrations.

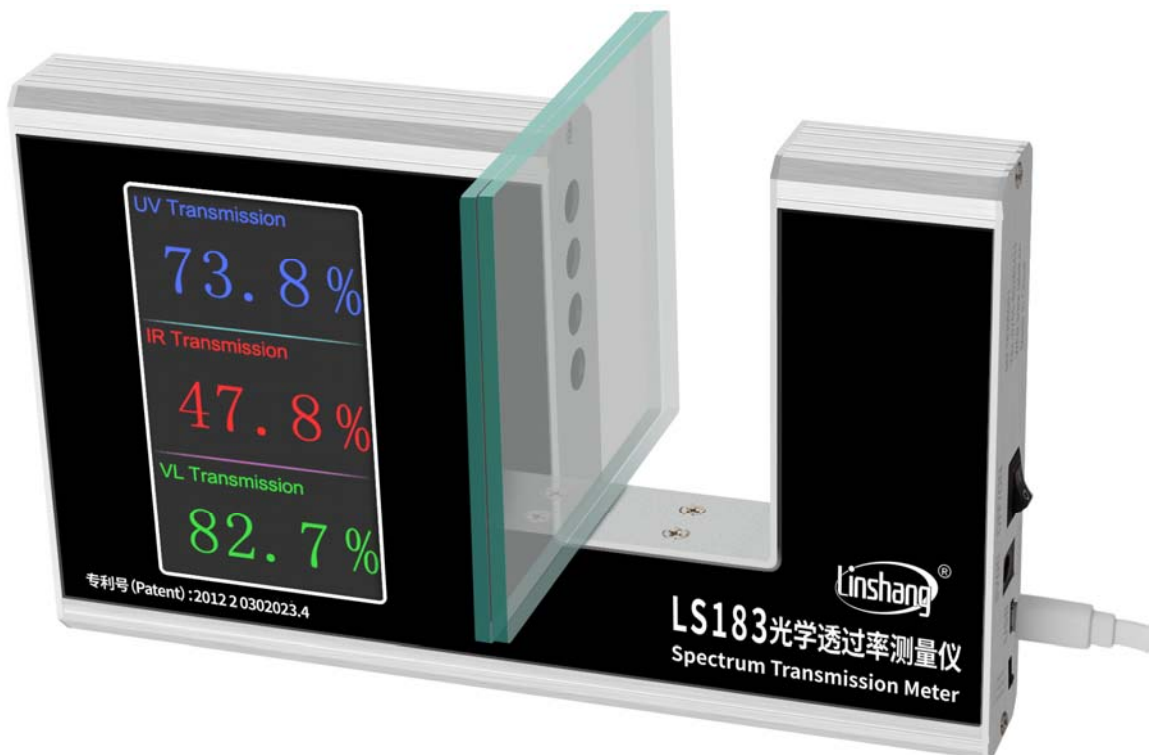

IV: Feature

1. UV transmission meter, IR transmission meter, Light Transmittance Meter, Three function in ONE device.
2. Self-calibration and auto-calibration, NO need any manual adjustments.



3. Simple operation, putting the testing sample in the opening, UV, VL and IR transmission values of the sample will simultaneously display.

V: Standard packing list

No.	Description	Quantity	Unit
1	LS183 Spectrum Transmission Meter	1	pcs
2	DC5V Adapter	1	pcs
3	User Manual	1	pcs
4	Certificate / warranty card	1	pcs

VI: Service

1. The meter has one-year warranty. If the meter works abnormally, please send the whole meter to the company for maintenance.
2. Provide users with spare parts and lifelong maintenance services.
3. Provide the users with the meter inspection service for free.
4. Free technical support for long term.

Manufacturer: Shenzhen Linshang Technology Co.,Ltd.

Website: www.linshangtech.com

Service hotline: 086-0755-86263411

Email: sales21@linshangtech.com